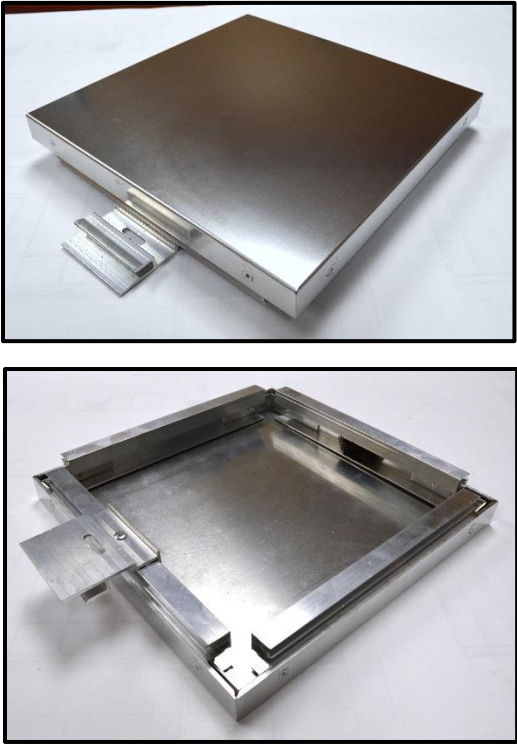


SÉRIE DURALUM - DA5000
Aluminum Rivet panel

Available thicknesses	3.2 mm
Joint width	5/8 in or 2 in
Panel thickness	2 in (Invariable)
Screws	Not visible
Installation	Vertically interlocking panel system. Possibility of removing a single panel (bottom or middle) without removing entire sequence, for damaged panels.
Other possible metals	Stainless steel
Features & Benefits	<ul style="list-style-type: none"> • Joint fillers slide into extrusion—no sealant required, fasteners not visible; • Possible to use different colored joint fillers for an original design.
Image of panel	

Contact 3D Panels inc. :
<http://3Dpanelsinc.com/>

Tel. : 1-877-731-7067
E-mail : customerservice@3DPanelsinc.com